




~DIN 7504 K

Standard withdrawn

ecosyn®-MRX

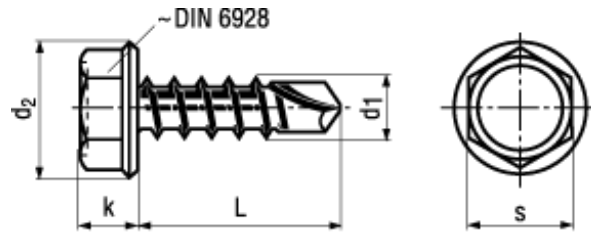

BN 14729

Hex head self-drilling screws

without sealing ring

Stainless steel


- ~UNI 8117




Fasteners out of martensitic stainless steel (e.g. 1.4116 / 1.4122 / 1.4034): susceptible to stress corrosion cracking under certain environmental conditions! Further notice to residual risks can be found in the introduction section (I).



A technical brochure is available on request

Article#	d ₁	d ₂ max.	k max.	s		L
1478818	ST4,2	8,8	4,25	7	1,75-3	13
1478834						16
1478850						19
3484371						25
3484372						32
1478877	ST4,8	10,5	4,45	8	1,75-4,4	13
1477315						16
1477323						19
1890050						22
1890069						25
3484374						32
3484375						38
1890077	ST5,5	11	5,45	8	1,75-5,25	16
1477331						19
1477358						25
1477390						32
1611844						38
3484376						45
1611852						50
3484377						55
3484379						65
3484380						75

Article#	d ₁	d ₂ max.	k max.	s		L
1477471	ST6,3	13,5	6,45	10	1,75-6	19
1477498						25
1477552						32
3484381						35
1477579						38
3484383						45
3484384						50