




DIN 7982 C

~ISO 7050

Standard withdrawn

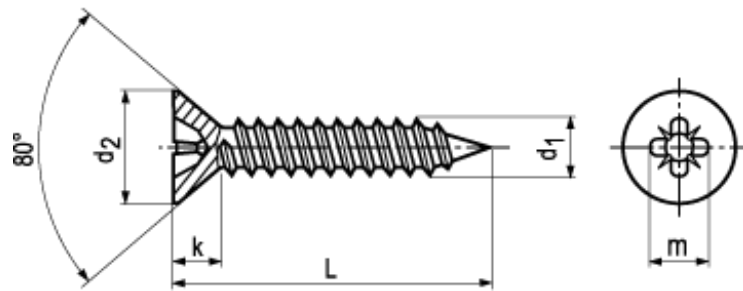

BN 11798

Pozi flat countersunk head tapping screws

form Z, with cone end type C

Stainless steel A4

- ~UNI 6955 AB
- ~CSN 021237



Countersunk must be designed according to the corresponding standard!

Article#	d ₁	d ₂ max.	k~		m~	L
3061099	ST2,2	4,3	1,3	1	2,4	6,5
3061100						9,5
3061101						13
3061103						16
3061104						19
3061106	ST2,9	5,5	1,7	1	2,8	6,5
3061107						9,5
3061108						13
3061110						16
3061111						19
3061112						22
3061114						25
3061115	ST3,5	6,8	2,1	2	4	6,5
3061116						9,5
3061117						13
3061118						16
3061119						19
3061120						22
3061121						25
3061123						32
3061124						38
3257073						50
3061126	(ST3,9)	7,5	2,3	2	4,2	9,5
3061127						13
3061129						16
3061130						19

Article#	d ₁	d ₂ max.	k~		m~	L
3061131	(ST3,9)	7,5	2,3	2	4,2	22
3061132						25
3061135						32
3061137						38
3061139	ST4,2	8,1	2,5	2	4,4	9,5
3061140						13
3061142						16
3061143						19
3061144						22
3061145						25
3061146						32
3061147						38
3061148						45
3061149						50
5805780						60
3061150	ST4,8	9,5	3	2	5	13
3061151						16
3061152						19
3061154						22
3061155						25
3061156						32
3061157						38
3061158						45
3061159						50
3061160						60
3061161						70
3061162						80
3061167	ST5,5	10,8	3,4	3	6,3	13
3061168						16
3061169						19
3061171						22
3061172						25
3061173						32
3061176						38
3061177						45
3061179						50
3061180						60
3061182						70
3061183						80
3061184	ST6,3	12,4	3,8	3	7	16
3061185						19

Article#	d ₁	d ₂ max.	k~		m~	L
3061187	ST6,3	12,4	3,8	3	7	25
3061188						32
3061190						38
3061191						45
3061192						50
3061194						60
3061195						70
3061196						80