




DIN 6926

ISO 7043

8

Standard withdrawn

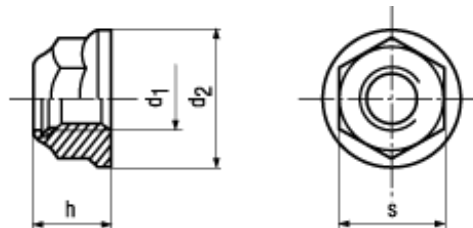

BN 6783

Prevailing torque type hex flange lock nuts

with polyamide insert

Steel 8

zinc plated blue

| Article# | d ₁ | d ₂ max. | h max. | s |
|----------|----------------|---------------------|--------|----|
| 1793535 | M5 | 11,8 | 7,1 | 8 |
| 1602942 | M6 | 14,2 | 9,1 | 10 |
| 1793543 | M8 | 17,9 | 11,1 | 13 |
| 1602950 | M10 | 21,8 | 13,5 | 15 |
| 1793551 | M12 | 26 | 16,1 | 18 |
| 1602969 | M16 | 34,5 | 20,3 | 24 |
| 1793578 | M20 | 42,8 | 24,8 | 30 |