



BN 1405 — Slotted oval countersunk head machine screws

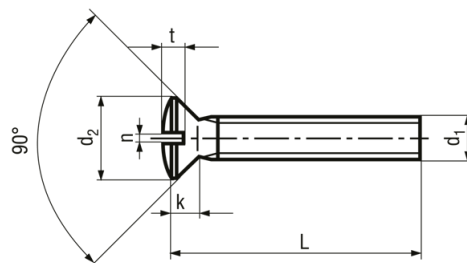


Standard	~DIN 964 A (Standard withdrawn) ~ISO 2010 ~UNI 6110 ~ČSN 021155
Headform	Oval countersunk
Drive	Slot
Thread	fully threaded
Material	Brass
Surface	plain

BN 1405 — Slotted oval countersunk head machine screws

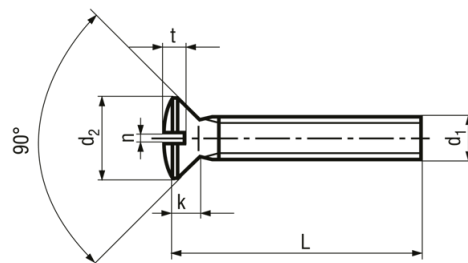

Article No.	d1	L	d2 max.	k max.	n	t min.
1162136	M3	8	5,6	1,65	0,8	1,2
1162144	M3	10	5,6	1,65	0,8	1,2
1162152	M3	12	5,6	1,65	0,8	1,2
1162179	M3	16	5,6	1,65	0,8	1,2
1162187	M3	20	5,6	1,65	0,8	1,2
1162209	M3	30	5,6	1,65	0,8	1,2
1162217	M4	6	7,5	2,2	1	1,6
1162225	M4	8	7,5	2,2	1	1,6
1162233	M4	10	7,5	2,2	1	1,6
1162241	M4	12	7,5	2,2	1	1,6
1162276	M4	16	7,5	2,2	1	1,6
1162284	M4	20	7,5	2,2	1	1,6
1162292	M4	25	7,5	2,2	1	1,6
1162306	M4	30	7,5	2,2	1	1,6
1162314	M4	35	7,5	2,2	1	1,6
1162322	M4	40	7,5	2,2	1	1,6
1162330	M4	45	7,5	2,2	1	1,6
1162349	M4	50	7,5	2,2	1	1,6
1162373	M5	10	9,2	2,5	1,2	2
1162381	M5	12	9,2	2,5	1,2	2
1162411	M5	16	9,2	2,5	1,2	2
1162438	M5	20	9,2	2,5	1,2	2
1162446	M5	25	9,2	2,5	1,2	2
1162454	M5	30	9,2	2,5	1,2	2

BN 1405 — Slotted oval countersunk head machine screws

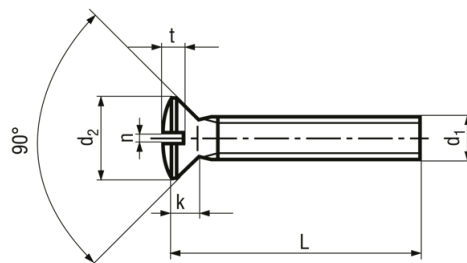

Article No.	d1	L	d2 max.	k max.	n	t min.
1162462	M5	35	9,2	2,5	1,2	2
1162470	M5	40	9,2	2,5	1,2	2
1162497	M5	50	9,2	2,5	1,2	2
1162500	M6	10	11	3	1,6	2,4
1162519	M6	12	11	3	1,6	2,4
1162535	M6	16	11	3	1,6	2,4
1162543	M6	20	11	3	1,6	2,4
1162551	M6	25	11	3	1,6	2,4
1162578	M6	30	11	3	1,6	2,4
1162586	M6	35	11	3	1,6	2,4
1162594	M6	40	11	3	1,6	2,4
1162616	M6	50	11	3	1,6	2,4
1162624	M6	60	11	3	1,6	2,4