





The head marking is determining

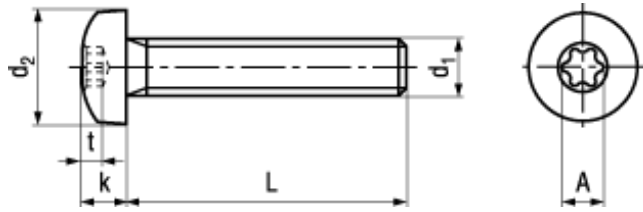


<b>BN 20005</b>
<b>Hexalobular (6 Lobe) socket pan head screws</b>
fully threaded
Steel 08.8 / 8.8
zinc plated blue

**i** Fasteners to the given specification have a reduced loadability due to the head geometry according to ISO 898-1.

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		t max.	A~	L
3148243	M2	4	1,6	X6	0,77	1,75	3
3148245							4
3148246							5
3148248							6
3148249							8
3148250							10
3645573							12
3645574							16
3148251	M2,5	5	2,1	X8	1,04	2,4	3
3148252							4
3148253							5
3148254							6
3148255							8
3148257							10
3148258							12
3645576							16
3645577							20
3645578							25
3645579							30
3645580	M3	5,6	2,4	X10	1,27	2,8	4
3148261							5
3148262							6

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		t max.	A~	L
3148263	M3	5,6	2,4	X10	1,27	2,8	8
3148265							10
3148266							12
3148267							16
3148268							20
3148270							25
3148329							30
3645581							35
3645582							40
3645583	M4	8	3,1	X20	1,66	3,95	5
3148330							6
3148331							8
3148332							10
3148333							12
3148334							16
3148335							20
3148336							25
3148337							30
3645584							35
3645585							40
3645586	M5	9,5	3,7	X25	1,91	4,5	5
3148338							6
3148339							8
3148340							10
3148341							12
3148342							16
3148343							20
3148344							25
3148345							30
3148346							35
3148347							40
3645587							45
3645588							50
3645589	M6	12	4,6	X30	2,42	5,6	6
3148348							8
3148349							10
3148352							12
3148353							16
3148355							20
3148356							25
3148357							30

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.		t max.	A~	L
3645590	M6	12	4,6	X30	2,42	5,6	35
3645591							40
3645592							45
3645593							50
3148359	M8	16	6	X45	3,18	7,95	10
3148360							12
3148362							16
3148363							20
3148364							25
3148366							30
3148367							35
3148368							40