




DIN 968 C

450 HV

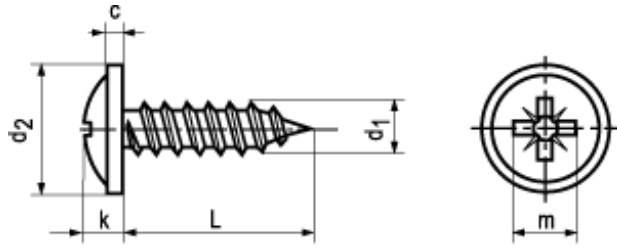

BN 14072

Pozi pan head tapping screws

with collar, form Z and cone end type C


Steel case-hardened 450 HV

zinc plated blue



ISO 4042

Fasteners hardness ≥ 320 HV with electroplated coatings:
Susceptible to hydrogen embrittlement!
Further notice to residual risks can be found in the introduction section.

Article#	d ₁	d ₂ max.	k max.	c max.		m~	L
2099837	ST 2,9	7,5	2,35	0,8	1	2,9	6,5
2099845							9,5
2099853							13
2099861							16
2099888	ST 3,5	9	2,6	0,9	2	3,9	6,5
2099896							9,5
2099918							13
2099926							16
2099934							19
2099942	ST 4,2	10	3,05	1,1	2	4,3	9,5
2099950							13
2099969							16
2099977							19
2099985	ST 4,8	11,5	3,55	1,35	2	4,7	9,5
2099993							13
2100002							16
2100010							19