




The head marking is determining

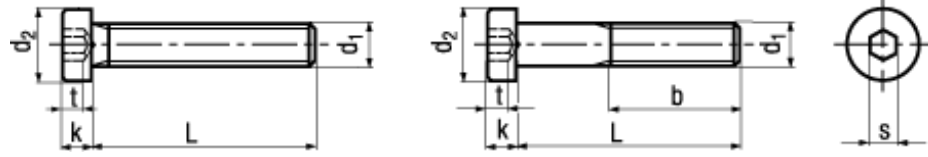

<b>BN 17</b>
<b>Hex socket head cap screws</b>
with low head, partially / fully threaded
Steel 08.8 / 8.8
zinc plated blue
• ~UNI 9327

**i** Fasteners to the given specification have a reduced loadability due to the head geometry according to ISO 898-1.

b: the partially threaded version can not always be guaranteed

Article#	d <sub>1</sub>	d <sub>2</sub>	k	s	t	b	L
3186756	M3	5,5	2	2	1,5	-	5
5503266							6
3186761							8
5503267							10
5503268							12
3646125							16
3646126						12	20
3646127							25
3646128							30
5503269	M4	7	2,8	2,5	2,3	-	6
1019643							8
1019651							10
1019678							12
1019694							16
1019708							20
1019716						14	25
3055508							30
3646129							35
3646131							40
3170948	M5	8,5	3,5	3	2,7	-	6
1019724							8
1019732							10
1019740							12
1019759							(14)
1019767							16
1019775							20
1019783							25

b: the partially threaded version can not always be guaranteed

Article#	d <sub>1</sub>	d <sub>2</sub>	k	s	t	b	L
1019791	M5	8,5	3,5	3	2,7	16	30
3055509							35
3646132							50
1019805	M6	10	4	4	3	-	10
1019813							12
1019821							(14)
1019848							16
1019856							20
1102257							25
1019864						18	30
3055511							35
3186762							40
3186763							50
1019872	M8	13	5	5	3,8	-	12
1019880							(14)
1019899							16
3186764							(18)
1019902							20
1019910							25
1019929							30
3055513						22	35
3186765							40
3186766							50
3186767							60
3170950	M10	16	6	7	4,5	-	12
3170951							14
1019937							16
1019945							20
1019953							25
1019961							30
3055514							35
3170952						26	40
3170954							50
3170957	M12	18	7	8	5	-	20
3170958							25
5513569							30
3170959							35
5503277							40
5519067	M16	24	9	12	5,5	-	30
5513571							35
5513572							40