




DIN 966 A

~ISO 7047

Standard withdrawn

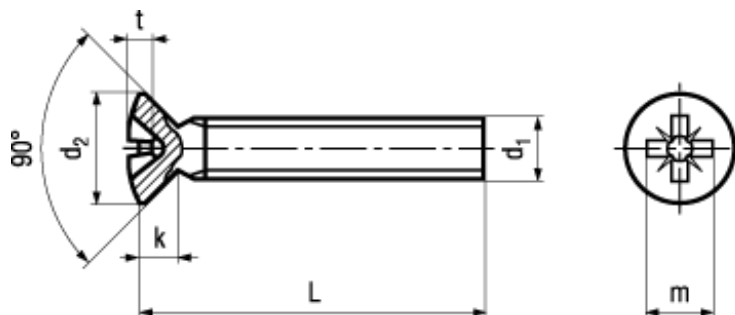

BN 3312

Pozi oval countersunk head machine screws

form Z

Stainless steel A4

- ~UNI 7689
- ~CSN 021156

Article#	d ₁	d ₂ max.	k max.		m~	t min.	t max.	L
1541269	M2,5	4,7	1,5	1	2,8	1,5	1,75	5
1541277								6
1541285								8
1541293								10
1541307	M3	5,6	1,65	1	3,1	1,83	2,08	5
1541315								6
1541323								8
1541331								10
1541358								12
1541366								16
1541374								20
1541382								25
1541390	M4	7,5	2,2	2	4,6	2,26	2,72	6
1541404								8
1541412								10
1541420								12
1541439								16
1541447								20
1541455								25
1541463								30
3202148								35
3202149								40

Article#	d ₁	d ₂ max.	k max.		m~	t min.	t max.	L
1541471	M5	9,2	2,5	2	5,3	2,89	3,35	8
1541498								10
1541501								12
1541528								16
1541536								20
1541544								25
1541552								30
5807580								35
5807590								40
5807595								50
5807600	M6	11	3	3	7	3,3	3,76	10
1541560								12
1541579								16
1541587								20
1541595								25
1541609								30
5807610								35
1541617								40
5807620								50