


~DIN 7504 P | ecosyn®-MRX



Standard withdrawn



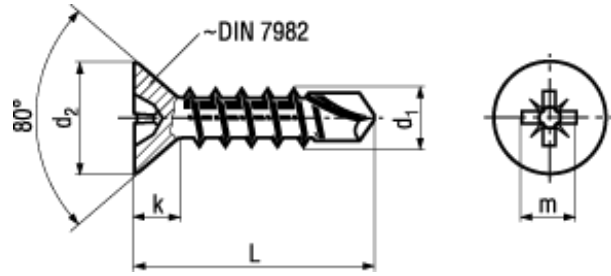

BN 14728
Pozi flat countersunk head self-drilling screws
form Z
Stainless steel
• ~UNI 8119

! Fasteners out of martensitic stainless steel (e.g. 1.4116 / 1.4122 / 1.4034): susceptible to stress corrosion cracking under certain environmental conditions! Further notice to residual risks can be found in the introduction section (I).

i Countersink must be designed according to the corresponding standard!
A technical brochure is available on request.

Article#	d ₁	d ₂ max.	k max.		m~		L
3484327	ST3,5	6,8	2,35	2	4	1,3-2,25	13
1477587							16
3484328							19
1477595							22
3484329							25
3484331							32
3484333	(ST3,9)	7,5	2,6	2	4,2	1,3-2,4	13
1890042							16
1477609							19
3484334							22
1477617							25
3484336							32
3484337	ST4,2	8,1	2,85	2	4,4	1,75-3	13
1890034							16
1477625							19
3484338							22
1477633							25
3484339							32
3484351							38
3484352	ST4,8	9,5	3,4	2	5	1,75-4,4	16
1890026							19
1477641							25

Article#	d ₁	d ₂ max.	k max.		m~		L
1477668	ST4,8	9,5	3,4	2	5	1,75-4,4	32
3484353							38
3484354							45
3484355							50