


Hex head flange screws / bolts partially / fully threaded

BN 41200

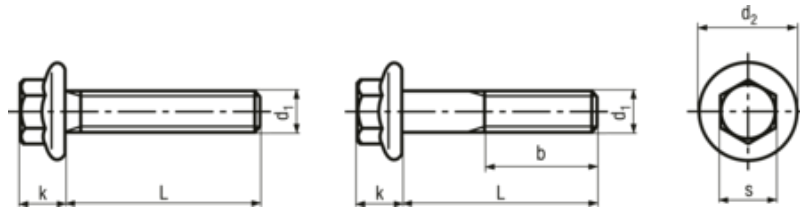

Headform	Hexagonal with flange
Drive	Hexagon
Thread	partially / fully threaded
Material	Steel
Strength class	8.8
Surface	zinc plated blue
Standard	DIN 6921 (Standard withdrawn), EN 1665

M10; M12; M16: wrench size according to EN on request

Article no.	d1	L	d2 max.	k max.	s	b
3220844	M6	10	14,2	6,6	10	-
3220846	M6	12	14,2	6,6	10	-
4001313	M6	16	14,2	6,6	10	-
3092382	M6	20	14,2	6,6	10	-
4001314	M6	25	14,2	6,6	10	18
3092383	M6	30	14,2	6,6	10	18
9057935	M8	12	18	8,1	13	-
4001315	M8	16	18	8,1	13	-
3092384	M8	20	18	8,1	13	-
3092706	M8	25	18	8,1	13	-
4001316	M8	30	18	8,1	13	-
3092385	M8	35	18	8,1	13	22
3092386	M8	40	18	8,1	13	22
4001317	M8	50	18	8,1	13	22

Article no.	d1	L	d2 max.	k max.	s	b
4002501	M10	16	22,3	9,2	15	-
4002502	M10	20	22,3	9,2	15	-
3092387	M10	25	22,3	9,2	15	-
4001320	M10	30	22,3	9,2	15	-
3092388	M10	35	22,3	9,2	15	-
3092389	M10	40	22,3	9,2	15	26
4002507	M10	50	22,3	9,2	15	26
3092707	M12	20	26,6	11,5	16	-
3092391	M12	25	26,6	11,5	16	-
3092708	M12	30	26,6	11,5	16	-
3092709	M12	35	26,6	11,5	16	-
3092392	M12	40	26,6	11,5	16	-
3092710	M12	50	26,6	11,5	16	30
3092393	M12	80	26,6	11,5	16	30
3092713	M16	40	35	14,4	21	-
3092714	M16	70	35	14,4	21	38