


ISO 7380-1

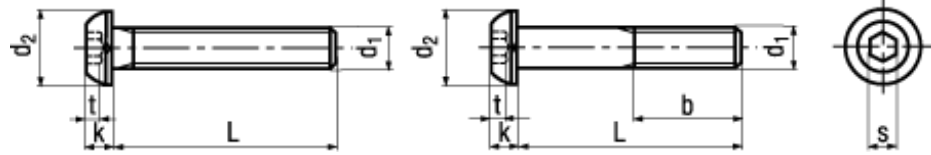

BN 8699
Hex socket button head cap screws
partially / fully threaded
Stainless steel A4
<ul style="list-style-type: none"> Tensile strength min. 600 N/mm² Proof stress 0,2% min. 450 N/mm²

M2; M2,5: not included in ISO 7380-1, b: the partially threaded version can not always be guaranteed

Article#	d ₁	d ₂ max.	k max.	s	t min.	b	L
1726536	M2	3,5	1,3	1,3	0,6	-	3
1726544							4
1726552							5
1726560							6
1726579							8
1726641							10
1727192							12
1727397							16
1727419							20
1727559	M2,5	4,7	1,5	1,5	0,8	-	4
1727702							5
1727796							6
1727826							8
1727850							10
1727877							12
1727915							16
1719866							20
1720333	M3	5,7	1,65	2	1,04	-	5
1720368							6
1720384							8
1720406							10
1720414							12

M2; M2,5: not included in ISO 7380-1, b: the partially threaded version can not always be guaranteed

Article#	d ₁	d ₂ max.	k max.	s	t min.	b	L
1720457	M3	5,7	1,65	2	1,04	-	16
1720473							20
1720481						18	25
1720503							30
1720554	M4	7,6	2,2	2,5	1,3	-	6
1720759							8
1720775							10
1720791							12
1720813							16
1720821							20
1720856							25
1720872						20	30
1720953	M5	9,5	2,75	3	1,56	-	8
1721100							10
1721135							12
1721178							16
1721194							20
1721208							25
1721216						22	30
1721232							35
1721240							40
1721267	M6	10,5	3,3	4	2,08	-	8
1721283							10
1721305							12
1721313							16
1721321							20
1721356							25
1721372							30
1727966						24	35
1727982							40
1728733							45
1728768							50
1728776	M8	14	4,4	5	2,6	-	10
1728784							12
1728792							16
1728849							20
1728857							25
1728873							30
1728881							35
1728903						28	40