




DIN 7983 C ~ISO 7051

Standard withdrawn

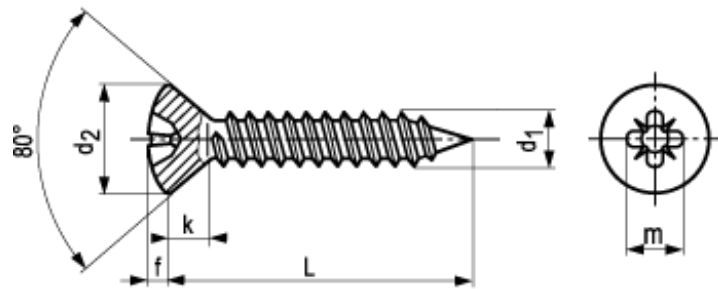


BN 11801


Pozi oval countersunk head tapping screws


form Z, with cone end type C

Stainless steel A4

- ~UNI 6956 AB
- ~CSN 021239

Article#	d ₁	d ₂ max.	f~	k~		m~	L
3060800	ST2,9	5,5	0,9	1,7	1	3,1	6,5
3060802							9,5
3060803							13
3060805							16
3060806							19
3060807							22
3060808							25
3060811	ST3,5	6,8	1,2	2,1	2	4,3	9,5
3060812							13
3060814							16
3060817							19
3060818							22
3060820							25
3060822							32
3060825							38
3060829	(ST3,9)	7,5	1,3	2,3	2	4,4	9,5
3060831							13
3060833							16
3060834							19
3060835							22
3060836							25
3060837							32
3060839							38
3060841	ST4,2	8,1	1,4	2,5	2	4,6	9,5
3060842							13

Article#	d ₁	d ₂ max.	f~	k~		m~	L
3060843	ST4,2	8,1	1,4	2,5	2	4,6	16
3060844							19
3060845							22
3060846							25
3060847							32
3060848							38
3060849							45
3060850							50
5805790							60
5805800	ST4,8	9,5	1,5	3	2	5,1	9,5
3061207							13
3061209							16
3061210							19
3061211							22
3061212							25
3061213							32
3061214							38
3061216							45
3061217							50
3061218							60
3061219							70
5805810							80
3061220	ST5,5	10,8	1,7	3,4	3	6,6	13
3061221							16
3061222							19
3061223							22
3061224							25
3061226							32
3061227							38
3061228							45
3061229							50
3061230							60
3061231							70
3061232							80
3061234	ST6,3	12,4	2	3,8	3	7,1	16
3061235							19
3061237							25
3061240							32
3061241							38
3061242							45
3061243							50

Article#	d ₁	d ₂ max.	f~	k~		m~	L
3061244	ST6,3	12,4	2	3,8	3	7,1	60
3061245							70
3061246							80