


TufLok®

BN 2109 - Hexalobular socket countersunk flat head screws fully threaded with TufLok® patch

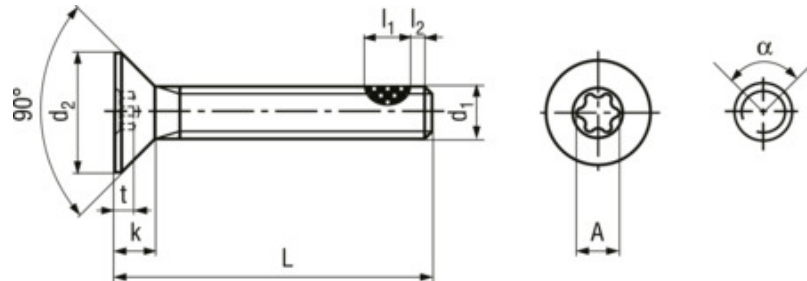

| | |
|------------------------|--|
| Standard | ISO 14581, |
| Manufacturer | TufLok® |
| Additional information | Coating angle α in the screw body area approx. 90°. Edge zone (spray transition) up to 180°. Coating length $l_1 = \sim 4$ to 6 thread turns. Around 2 to 3 thread turns remain uncoated to ensure flawless installation (l_2). |
| Headform | Countersunk head |
| Drive | Hexalobular socket |
| Thread | fully threaded |
| Brand | TufLok® |
| Material | Steel |
| Property class | 08.8 / 8.8 (The head marking is determining) |
| Surface | zinc plated blue |

| Article no. | d1 | L | d2 max. | k max. | Hexalobular socket | t max. | A~ |
|-------------|------|---|---------|--------|--------------------|--------|------|
| 9012010 | M2 | 4 | 3,8 | 1,2 | X6 | 0,64 | 1,75 |
| 9012011 | M2 | 6 | 3,8 | 1,2 | X6 | 0,64 | 1,75 |
| 9012012 | M2 | 8 | 3,8 | 1,2 | X6 | 0,64 | 1,75 |
| 9012013 | M2,5 | 3 | 4,7 | 1,5 | X8 | 0,79 | 2,4 |
| 9012014 | M2,5 | 5 | 4,7 | 1,5 | X8 | 0,79 | 2,4 |
| 9012015 | M2,5 | 6 | 4,7 | 1,5 | X8 | 0,79 | 2,4 |
| 9012016 | M3 | 5 | 5,5 | 1,65 | X10 | 0,83 | 2,8 |
| 9012017 | M3 | 6 | 5,5 | 1,65 | X10 | 0,83 | 2,8 |
| 9012018 | M3 | 8 | 5,5 | 1,65 | X10 | 0,83 | 2,8 |

| Article no. | d1 | L | d2 max. | k max. | Hexalobular socket | t max. | A~ |
|-------------|----|----|---------|--------|--------------------|--------|------|
| 9012019 | M3 | 10 | 5,5 | 1,65 | X10 | 0,83 | 2,8 |
| 9012020 | M4 | 5 | 8,4 | 2,7 | X20 | 1,53 | 3,95 |
| 9012021 | M4 | 6 | 8,4 | 2,7 | X20 | 1,53 | 3,95 |
| 9012022 | M4 | 8 | 8,4 | 2,7 | X20 | 1,53 | 3,95 |
| 9012023 | M4 | 10 | 8,4 | 2,7 | X20 | 1,53 | 3,95 |
| 9012024 | M4 | 12 | 8,4 | 2,7 | X20 | 1,53 | 3,95 |
| 9012025 | M4 | 16 | 8,4 | 2,7 | X20 | 1,53 | 3,95 |
| 9012026 | M5 | 10 | 9,3 | 2,7 | X25 | 1,51 | 4,5 |
| 9012027 | M5 | 12 | 9,3 | 2,7 | X25 | 1,51 | 4,5 |
| 9012028 | M5 | 16 | 9,3 | 2,7 | X25 | 1,51 | 4,5 |
| 9012029 | M5 | 20 | 9,3 | 2,7 | X25 | 1,51 | 4,5 |